


STROOMAGGREGAAT GE 2500 H FAMILY

- Honda OHC benzinemotor
- Motorstop bij laag olieniveau
- Enkelfase synchrone generator
- Wankontakdozen: 2 x 230V 16A 2P+T SCHUKO
- Thermische beveiliging tegen overbelasting
- Acculader
- Buizenframe
- Geluidgedempt
- Draagbaar
- Voldoet aan EG veiligheids- en geluidsnormen

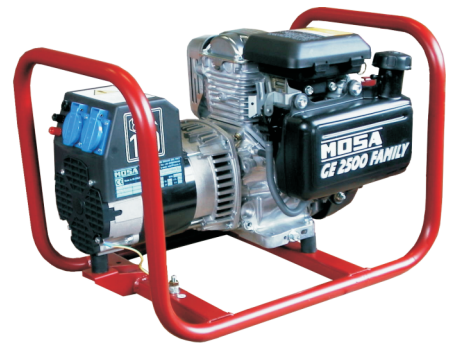

Standaard uitrusting										
	Petrol engine	Air cooling	Manual recoil	Engine shut down (oil)						
	Synchronous alternator	Sockets	Thermal shut off	Battery charger						

Opties

● 230V Plug

● Earthing kit

Technische gegevens

GE 2500 H FAMILY

A.C. GENERATOR - 50 Hz

Single-phase synchronous alternator, self-excited, self-regulated, brushless

* Stand-by single-phase power

2.3 kVA / 230V / 10A

* P.R.P. single-phase power

2 kVA / 230V / 8.7 A

Cos φ

1

Battery charger

12V d.c. / 10A

Insulation class

H

* Output powers according to ISO 8528-1

MOTOR

4-stroke petrol, air cooled, OHC

Model

Honda GC 160?

* Stand-By net power

3 kW (4.1 HP)

* P.R.P. net power

2.5 kW (3.4 HP)

Cylinders/ Displacement

1/ 160 cm³

Speed

3000 rpm

Fuel consumption (75% of P.R.P.)

0.97 l/h

* Powers according to SAE J1349

ALGEMENE SPECIFICATIES

Tank capacity

1.8 l

Running time (75% of P.R.P.)

2 h

IP protection degree

IP 21

Dimensions LxWxh (mm)

555x370x390 mm

Dry weight

29 kg

*Measured acoustic power LwA (pressure LpA)

95 dB(A)(70 dB(A) @ 7m)

*Guaranteed acoustic power LwA (pressure LpA)

96 dB(A)(71 dB(A) @ 7m)

* Acoustic power according to European Directive 2000/14/EC